



Applications

Wall-hung WC pan support frame designed for use against flat walls and in corners

Ideal for most domestic and commercial applications.

Water Saving


- ~ Provides 6/4 litre dualflush and quickly and easily converts before or after installation to 5/3 or 4/2.6 litre dualflush
- ~ 6 litre single flush also available
- ~ Delay fill Hydroflo inlet valve only allows cistern to start refilling once flushing is complete
- ~ European Water Label Scheme approved
- ~ Supports BREEAM.

Features

- ~ Unique design enables frame height to be set between 825mm and 1120mm for unrivalled installation flexibility
- ~ Height adjustable
- ~ Legs adjust to offer WC pan height fixing flexibility
- ~ Wall and floor fixing brackets can be fixed through 180 degrees and 360 degrees respectively to simplify installation
- ~ Strong steel tubular section construction
- ~ Blue painted finish and zinc plated wall and floor brackets
- ~ Flushbend and WC pan connector clamps
- ~ Integral factory fitted Dudley Vantage cistern
- ~ Floor and WC pan fixing bolts included.



Dimensional Data

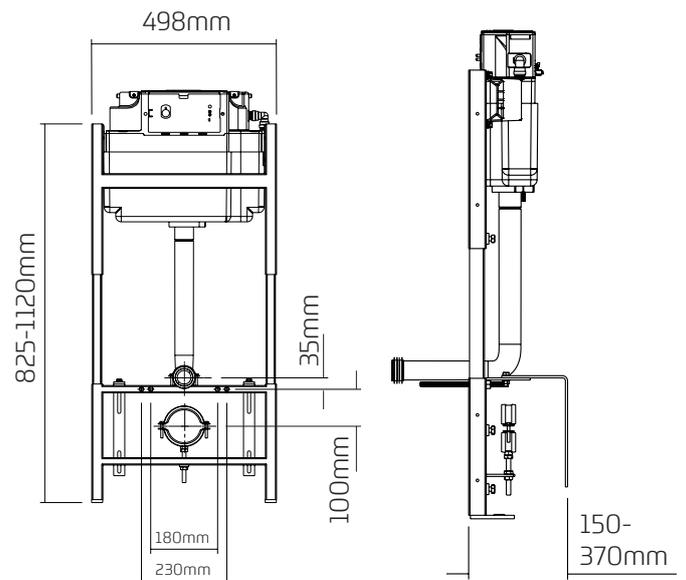

Technical Data

Operation	Pneumatic
Pneumatic tube length	750mm
Inlet	Side
Outlet	Valve
Fixing Orientation	Wall and floor fixed
Height Adjustment	MIN. 825mm - MAX. 1120mm
Load Capacity	Tested to 400kg