
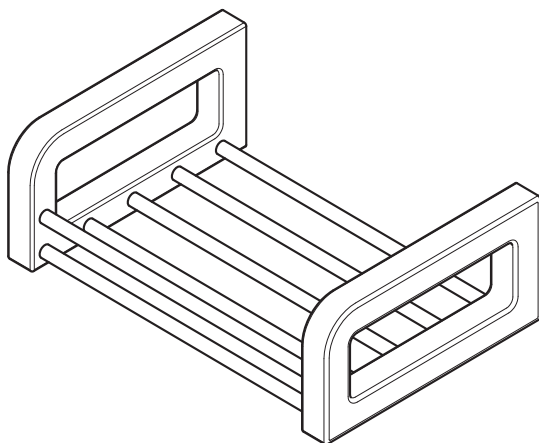



DP 4602 (CERAMIC) / DP 4603 (SHOWER)
FIFTH SOAP DISH
INSTALLATION GUIDE

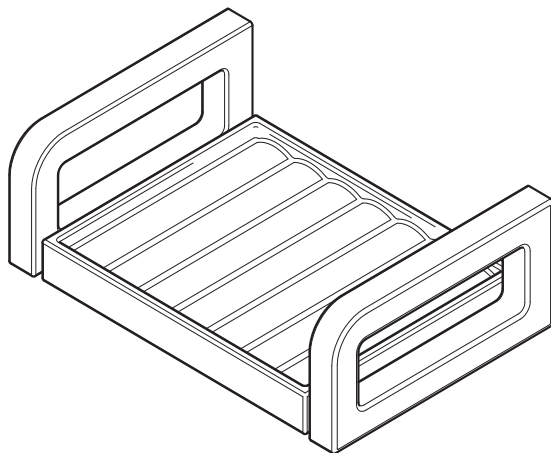

LEFROY BROOKS


DIMENSIONS

Shown with shower soap dish. Dimensions are the same for both soap dishes

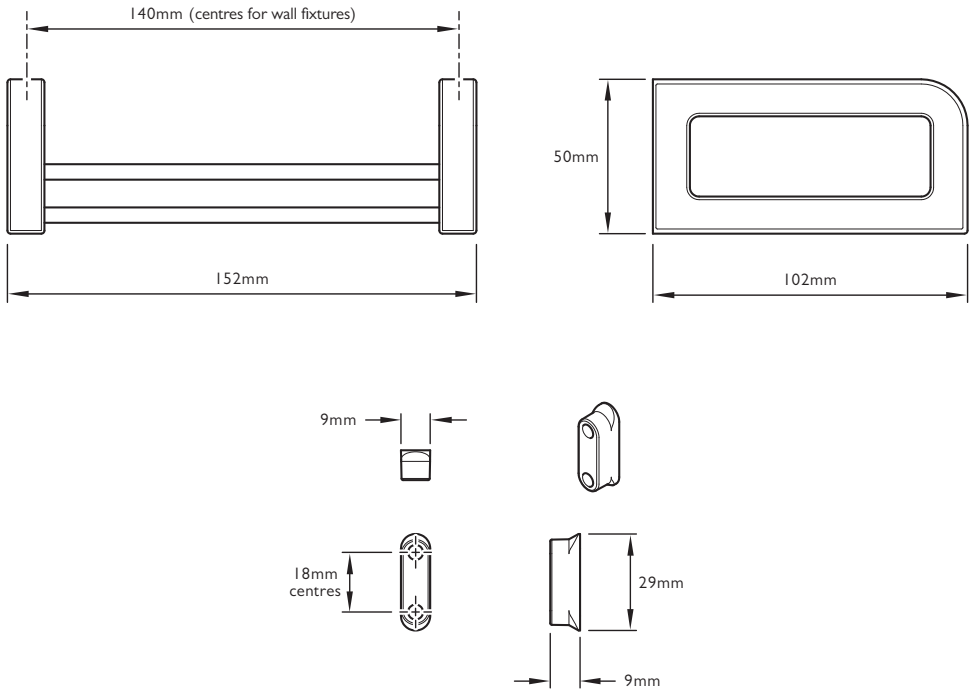


Not to scale


TOOLS REQUIRED



Powered drill with
Ø6mm drill bit



Flat blade screwdriver




Spirit level




Hexagonal Key

INSTALLATION

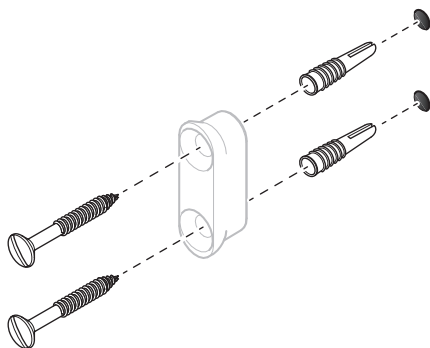

- 1 Mark the hole positions for the wall fixtures on the mounting surface. Use a spirit level to ensure the holes are vertically aligned and level.
- 2 Drill holes using a $\varnothing 6\text{mm}$ drill bit.
- 3 Insert the wall plugs into the holes then secure the wall fixtures using the screws supplied.

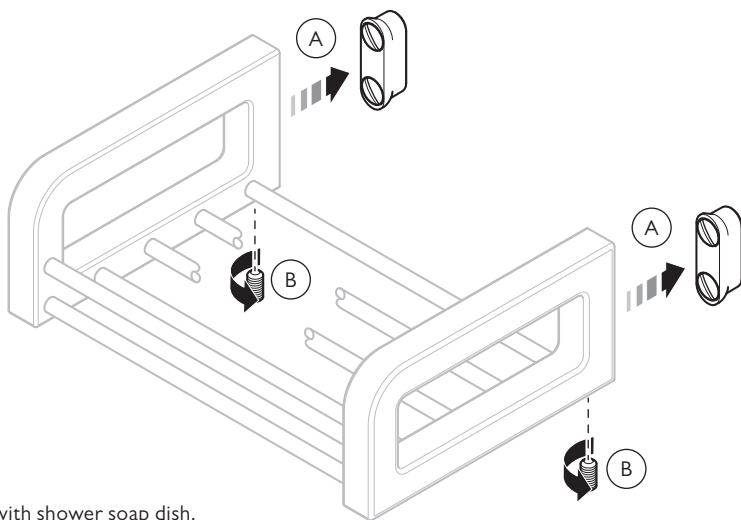

Shown with shower soap dish.

- 4 Locate the soap dish onto the wall fixtures (A).
- 5 Hexagonal socket set screws are located in the underside of the soap dish. Secure the soap dish using the hexagonal key (supplied) (B).



CUSTOMER SUPPORT

+44 (0)1992 708 316

LEFROYBROOKS.CO.UK

Whilst every effort is made to ensure the accuracy of these, they are subject to change without notice as part of the company's product development process. The use of trademarks, product design and artwork is subject to licence or agreement with LBIP Ltd. The design registrations, trademark registrations and copyrights are protected by law and the use or reproduction outside the terms of an agreement is prohibited. The right to modify designs and dimensions is reserved. LBIP Ltd is a member of ACID (Anti Copying in Design).