


## DP 4610 FIFTH GRAB BAR INSTALLATION GUIDE

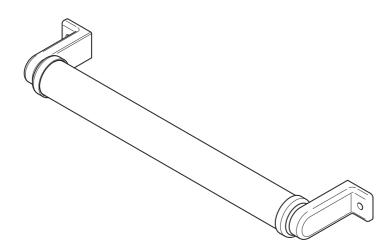


## LEFROY BROOKS

### DIMENSIONS

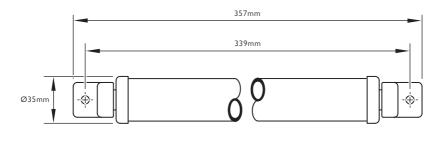





Not to scale

TOOLS REQUIRED




Powered drill with Ø7mm drill bit





Flat blade screwdriver

Spirit level

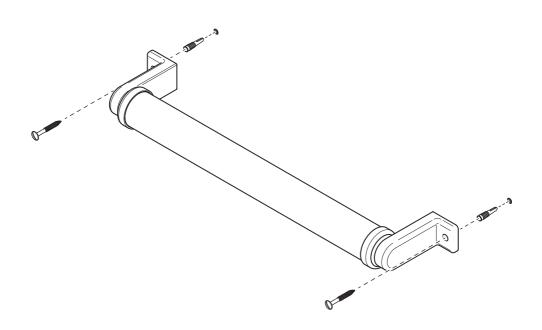

- I Place the grab bar onto the mounting surface.
  Use a spirit level to ensure the grab bar is level. Mark the hole positions on the mounting surface.
- 2 Drill holes using a Ø7mm drill bit.
- 3 Insert the wall plugs into the holes then secure the grab bar using the screws supplied.

20.065.216A / AUGUST 2016



# customer support +44 (0)1992 708 316

#### LEFROYBROOKS.CO.UK

Whilst every effort is made to ensure the accuracy of these, they are subject to change without notice as part of the company's product development process. The use of trademarks, product design and artwork is subject to licence or agreement with LBIP Ltd. The design registrations, trademark registrations and copyrights are protected by law and the use or reproduction outside the terms of an agreement is prohibited. The right to modify designs and dimensions is reserved. LBIP Ltd is a member of ACID (Anti Copying in Design).