
All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

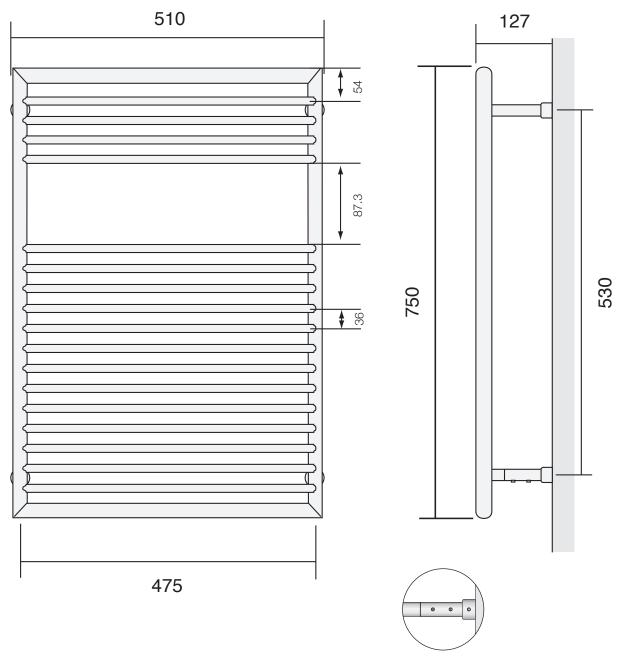

Enlarged image of concealed valve

Test pressure: 6 BAR

Max working pressure: 3 BAR

Max working temperature: 100°C

Connections: 15mm compression

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60: 1050

Overall height: 750


Width over flange: 510

Overall projection: 127

Pipe centre for valves: 475

Tube Ø mm: 25

Bard & Brazier rails are made in England from high quality brass and can be used on open or closed circuits All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

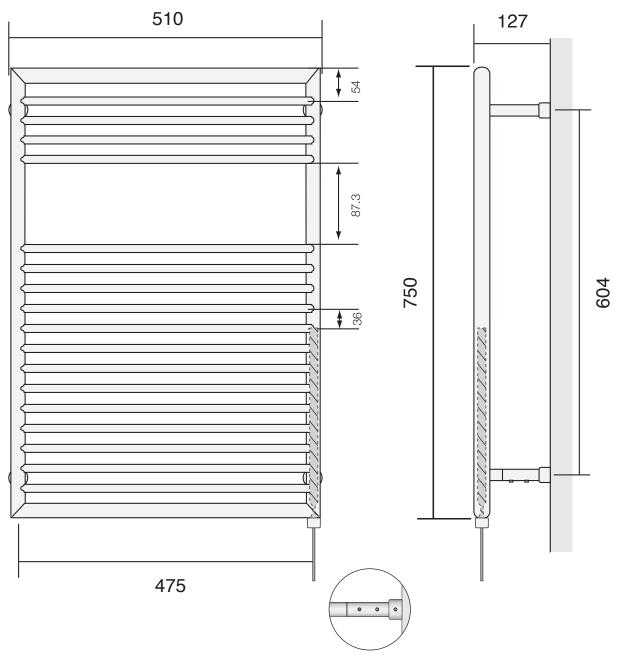

Enlarged image of concealed valve

Test pressure: 6 BAR

Max working pressure: 3 BAR

Max working temperature: 100°C

Connections: 15mm compression

Electric element: Right hand

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60: 1050

Electric element wattage: 125

Overall height: 750

(Approx 105mm required in addition for element)

Width over flange: 510

Overall projection: 127

Pipe centre for valves: 475

Tube ⊘ mm: 25

Bard & Brazier rails are made
in England from high quality brass
and can be used on open or closed
circuits