

All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

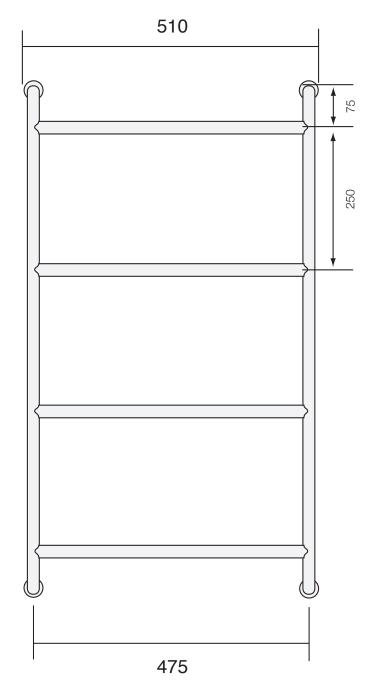

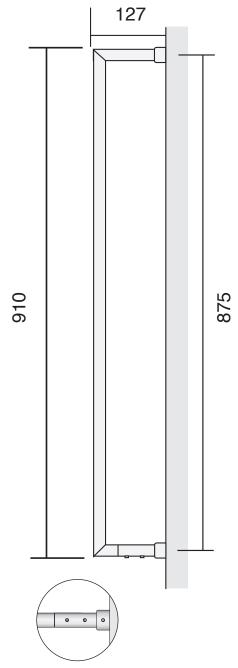

Enlarged image of concealed valve

Test pressure: 6 BAR

Max working pressure: 3 BAR

Max working temperature: 100°C

Connections: 15mm compression

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60: 610

Height over flange: 910

Width over flange: 510

Overall projection: 127


Pipe centre for valves: 475

Tube Ø mm: 25

Bard & Brazier rails are made in England from high quality brass and can be used on open or closed circuits

onounc

All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

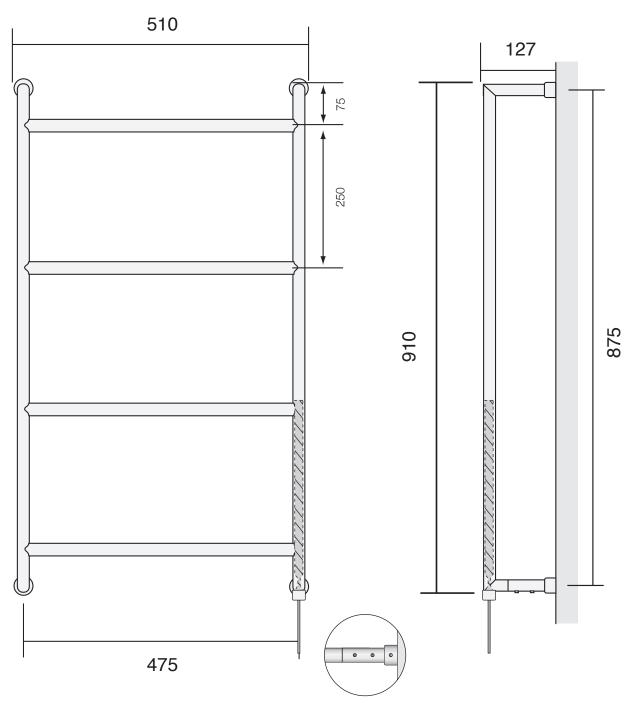

Enlarged image of concealed valve

25

Test pressure: 6 BAR

Max working pressure: 3 BAR

Max working temperature: 100°C

Connections: 15mm compression

Electric element: Right hand

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60: 610

Electric element wattage: 75

Height over flange: 910
(Approx 105mm required in addition for element)

Width over flange: 510

Width over flange: 510

Overall projection: 127

Pipe centre for valves: 475

Tube ⊘ mm:

Bard & Brazier rails are made
in England from high quality brass
and can be used on open or closed
circuits