




All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

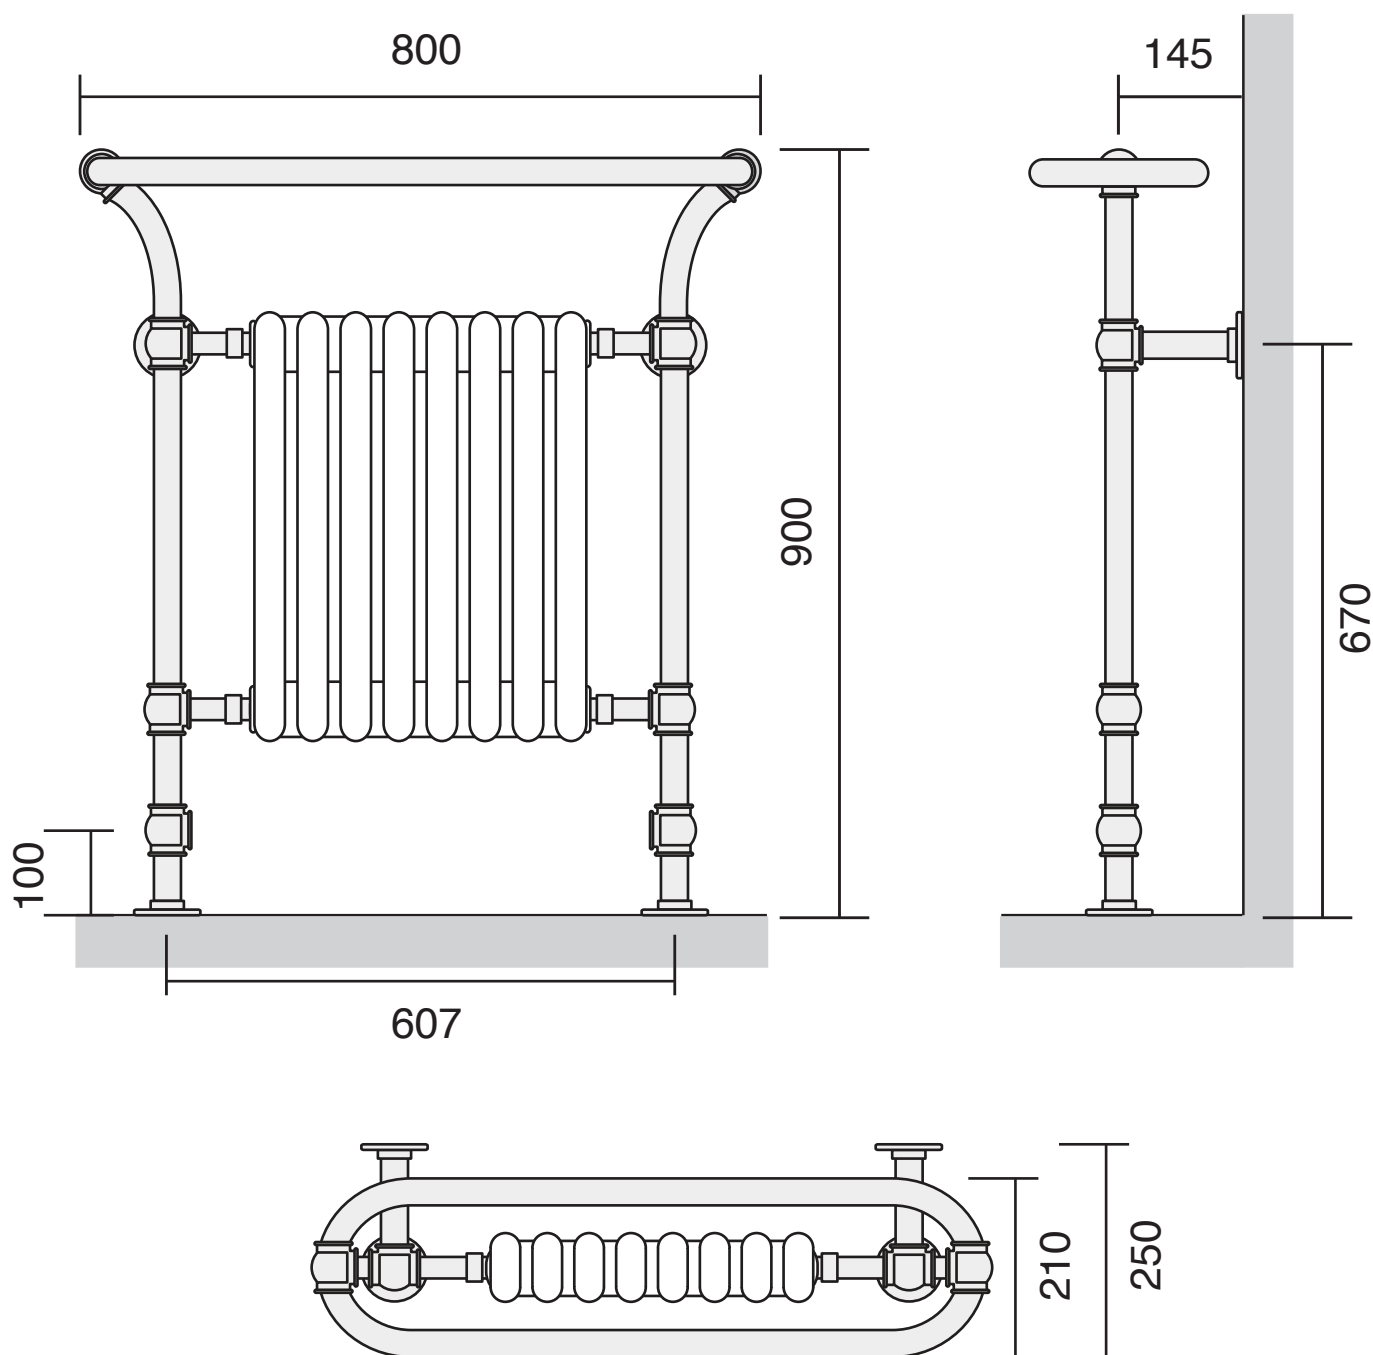

Test pressure: **6 BAR**

Max working pressure: **3 BAR**

Max working temperature: **100 °C**

Connections: **1/2" FI**

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60: **3768**

Height over flange: **900**

Width over flange: **800**

Overall projection: **250**


Face to face tappings: **550**

Tube Ø mm: **31.8**

The Bard & Brazier Florian rail is made in England from high quality brass and can only be used on closed circuits



All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

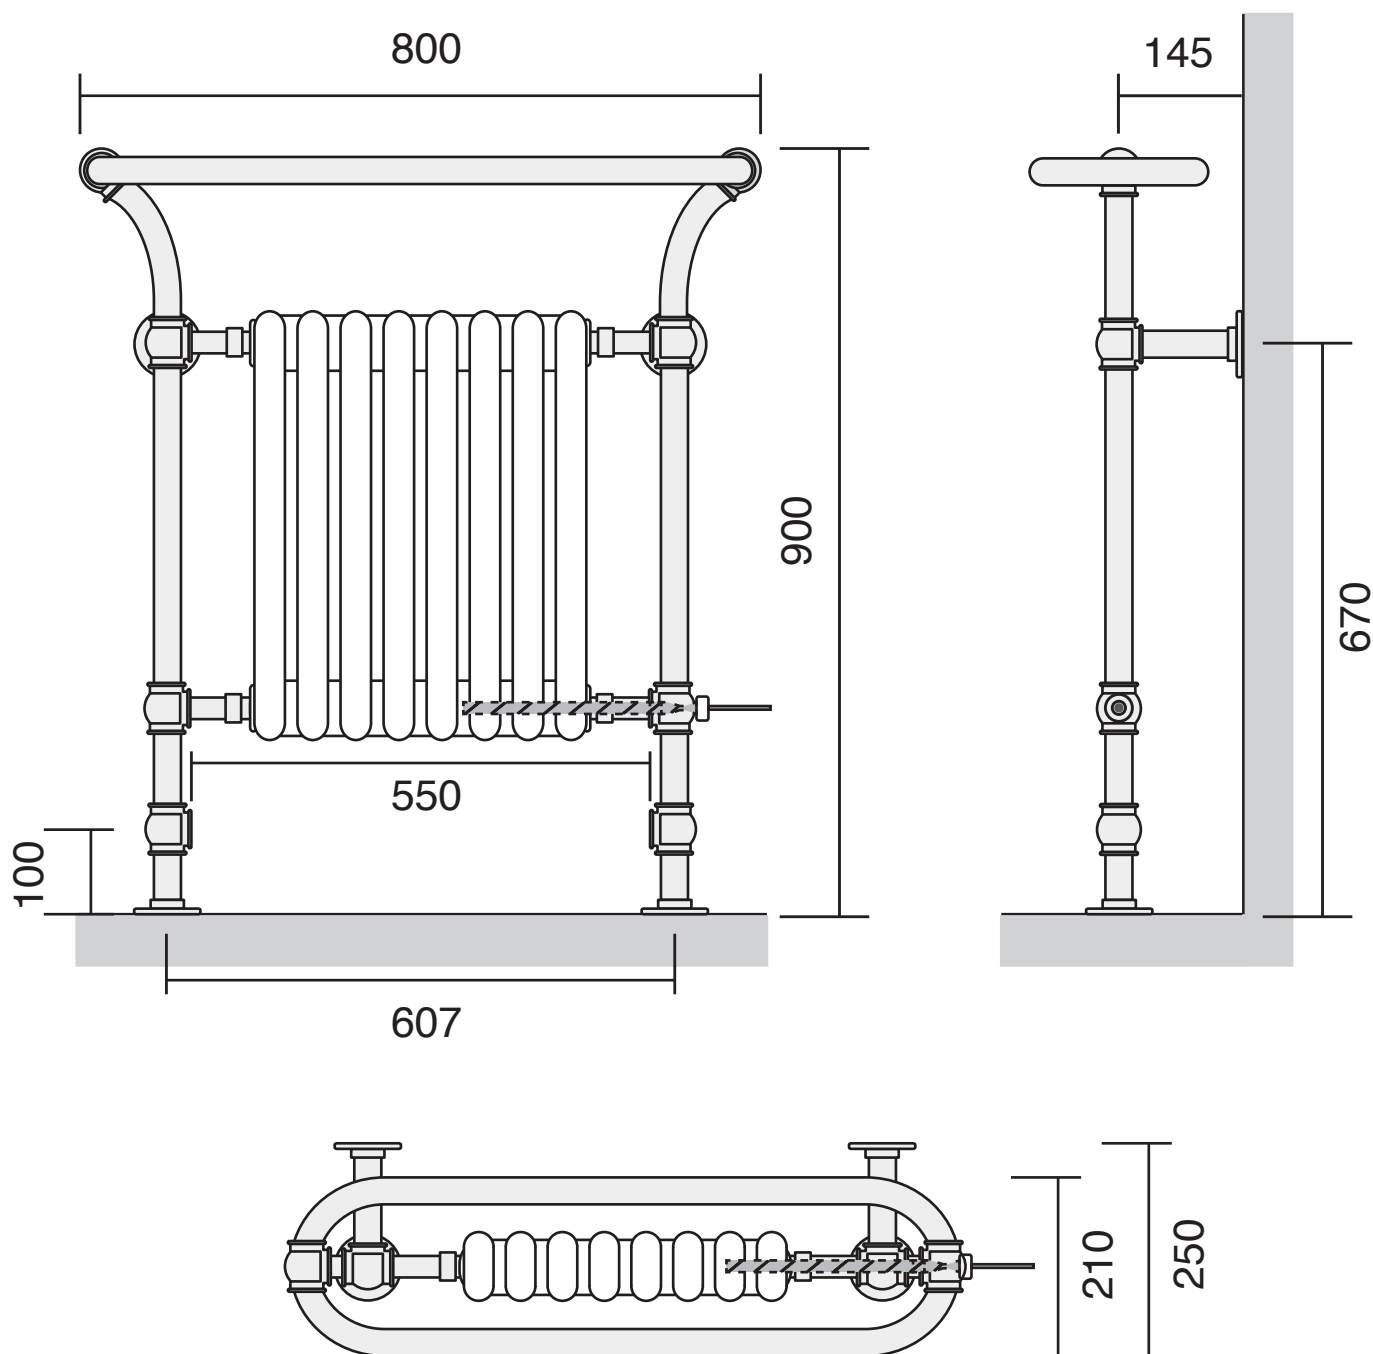

Test pressure: **6 BAR**

Max working pressure: **3 BAR**

Max working temperature: **100 °C**

Connections: **1/2" FI**

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60: **3768**

Electric element wattage: **250**

Height over flange: **900**

Width over flange: **800**
(Approx 70mm required in addition for element)

Overall projection: **250**


Face to face tappings: **550**

Tube Ø mm: **31.8**

The Bard & Brazier Florian rail is made in England from high quality brass and can only be used on closed circuits



All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

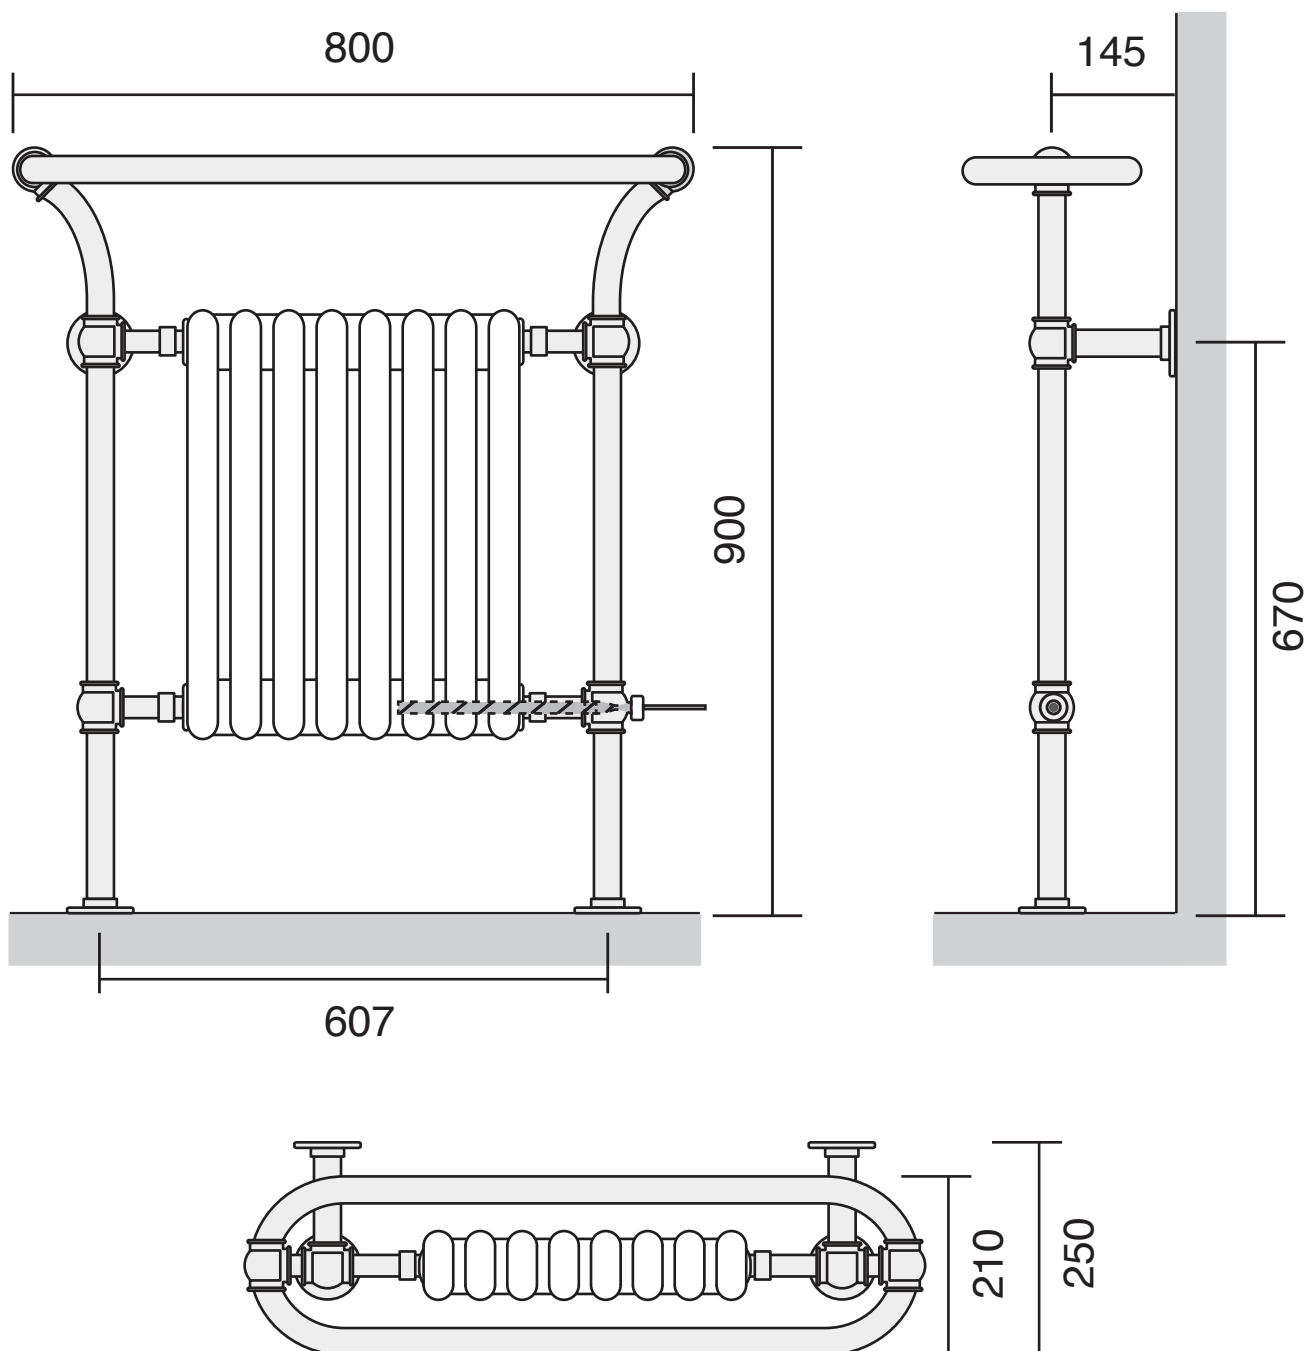

Test pressure: **6 BAR**

Electric element: **Right hand**

Heat output determined in accordance with EN 442

Electric element wattage: **250**

Height over flange: **900**

Width over flange: **800**
(Approx 70mm required in addition for element)

Overall projection: **250**

Tube \varnothing mm: **31.8**

The Bard & Brazier Florian rail is made in England from high quality brass and can only be used on closed circuits