
All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

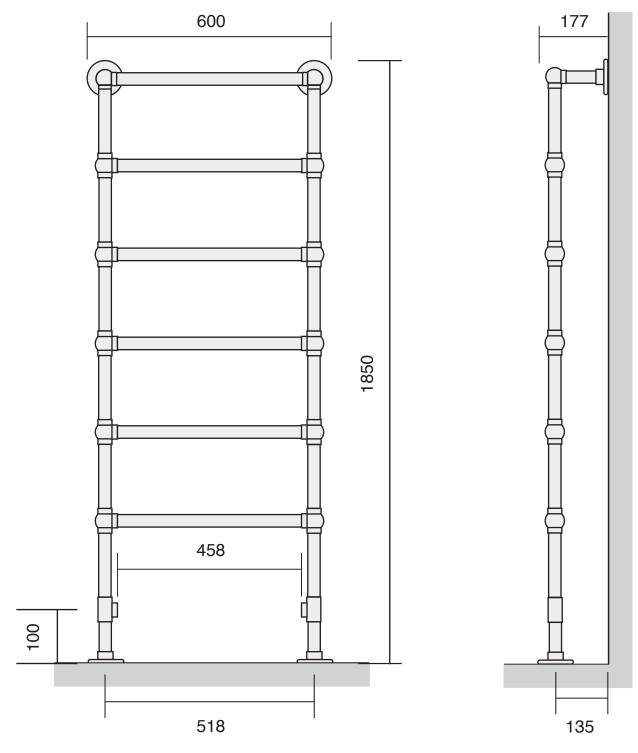

Test pressure: 6 BAR

Max working pressure: 3 BAR

Max working temperature: 100°C

Connections: 1/2" FI

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60: 1819

Height over flange: 1850

Width over flange: 600

Projection over flange: 177


Face to face tappings: 458

Tube Ø mm: 31.8

Bard & Brazier rails are made
in England from high quality brass
and can be used on open or closed
circuits

LFF185/60-DF

All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

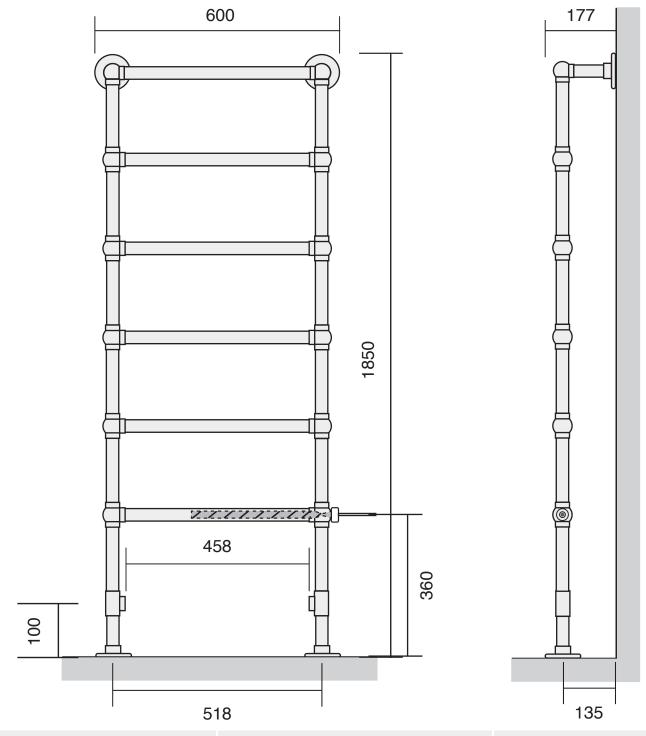

Test pressure: 6 BAR

Max working pressure: **3 BAR** 

Max working temperature: 100°C

Connections: 1/2" FI

Electric element: Right hand

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60: 1819

200 Electric element wattage:

Height over flange: 1850


Width over flange: 6 (Approx 80mm required in addition for element) 600

Projection over flange: 177

Face to face tappings: 458

Tube o mm: 31.8 Bard & Brazier rails are made in England from high quality brass and can be used on open or closed circuits

All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

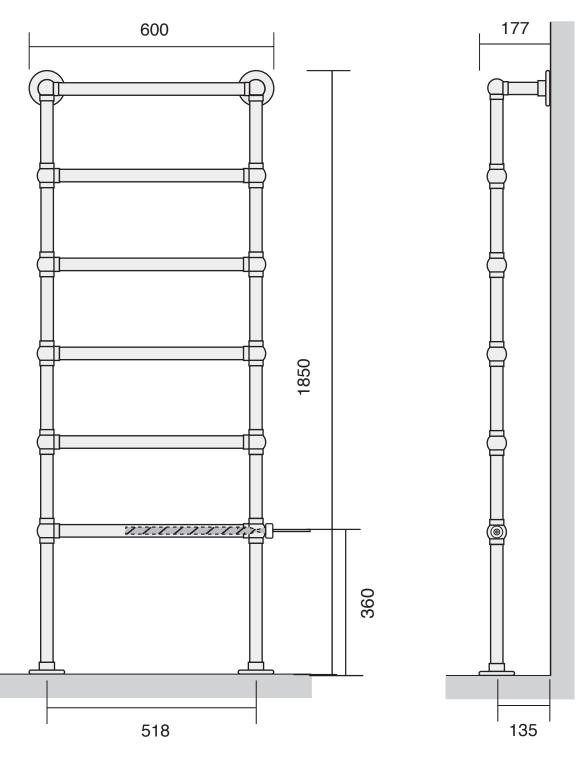

Test pressure:

6 BAR

Right hand Electric element:

Heat output determined in accordance with EN 442

Electric element wattage: 200

1850 Height over flange:

Width over flange: (Approx 80mm required in addition for element) 600

Projection over flange: 177

Tube Ø mm: 31.8 Bard & Brazier rails are made

in England from high quality brass