

All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

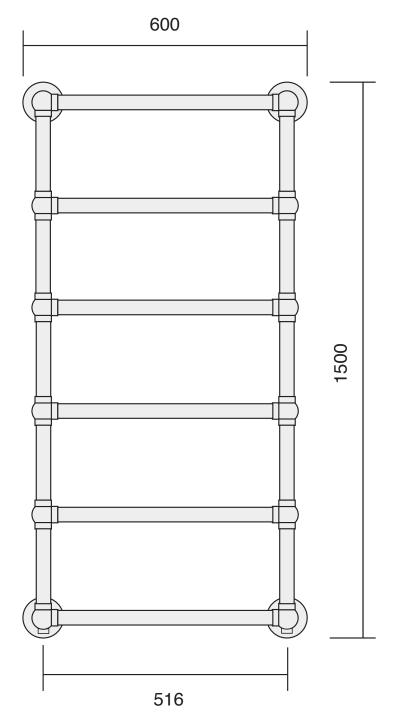

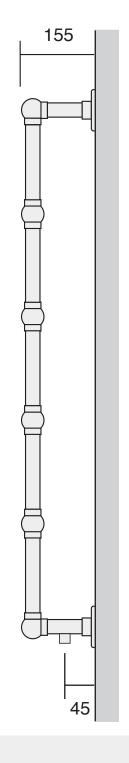

Test pressure: 6 BAR

Max working pressure: 3 BAR

Max working temperature: 100°C

Connections: 1/2" FI

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60: 1634

Height over flange: 1500

Width over flange: 600

Overall projection: 155

Valve centres: 516


Tube ⊘ mm: 31.8


www.bardbrazier.co.uk

Bard & Brazier rails are made
in England from high quality brass
and can be used on open or closed
circuits

LFW150/60-DF

All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

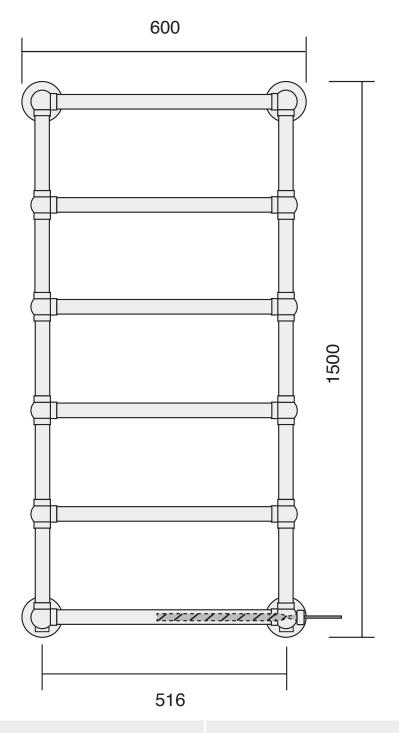

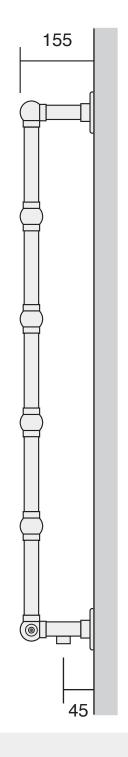

Test pressure: 6 BAR

Max working pressure: **3 BAR**

Max working temperature: 100°C

Connections: 1/2" FI

Electric element: Right hand

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60: 1634

Electric element wattage: 200

Height over flange: 1500

600

Width over flange: 6
(Approx 80mm required in addition for element)

Overall projection: 155

Valve centres: 516


31.8 Tube ⊘ mm:


Bard & Brazier rails are made

in England from high quality brass

and can be used on any system

All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

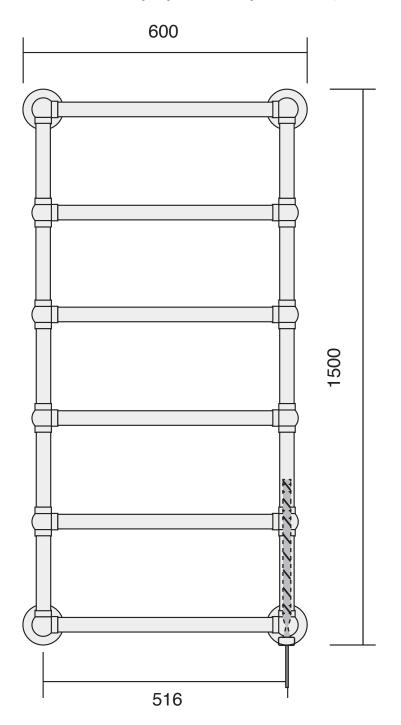

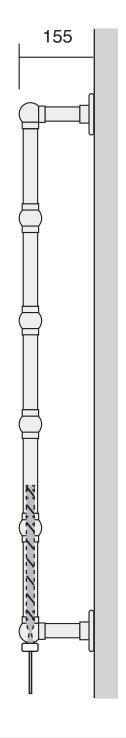

Test pressure: 6 BAR

Electric element: Right hand

Heat output determined in accordance with EN 442

Electric element wattage: 200

Height over flange: 1500

(Approx 80mm required in addition for element)

Width over flange: 600

Projection over flange: 155

Tube ⊘ mm: 31.8

Bard & Brazier rails are made

in England from high quality brass