

LFW150/80

All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

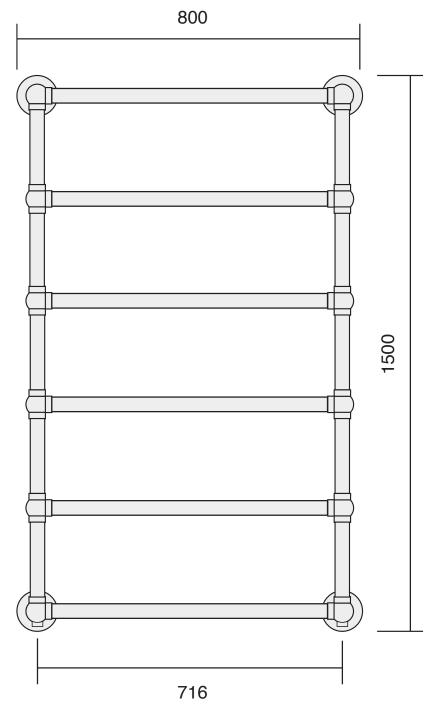

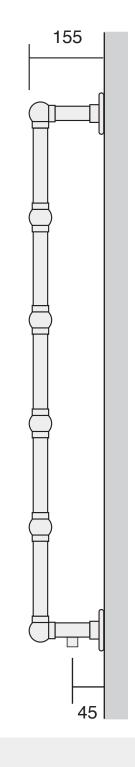

Test pressure: 6 BAR

Max working pressure: 3 BAR

Max working temperature: 100°C

Connections: 1/2" FI

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60: 1993

Height over flange: 1500

Width over flange: 800

Overall projection: 155

Valve centres: 716


Tube ⊘ mm: 31.8


Bard & Brazier rails are made
in England from high quality brass
and can be used on open or closed

circuits

LFW150/80-DF

All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

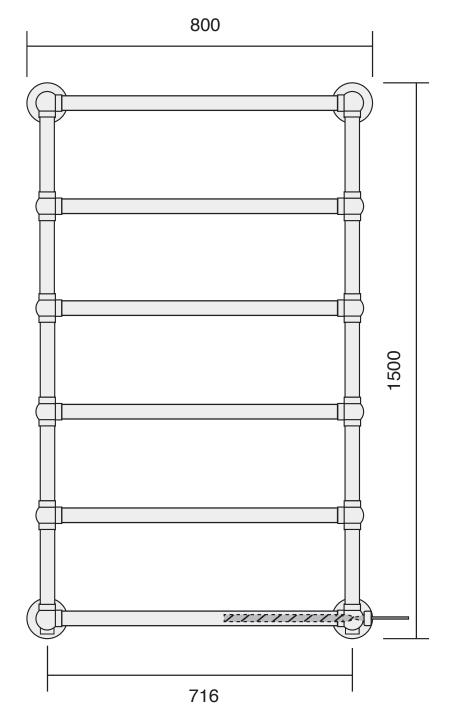

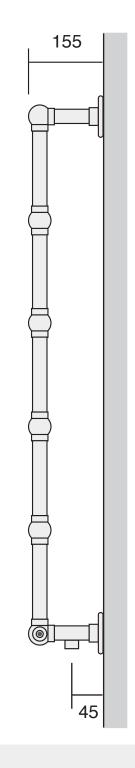

Test pressure: 6 BAR

Max working pressure: 3 BAR

Max working temperature: 100°C

Connections: 1/2" FI

Electric element: Right hand

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60: 1993

Electric element wattage: 200

Height over flange: 1500

Width over flange: 800

(Approx 80mm required in addition for element)


Overall projection: 155


Valve centres: 716

Tube ⊘ mm: 31.8

Bard & Brazier rails are made
in England from high quality brass
and can be used on open or closed
circuits

All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

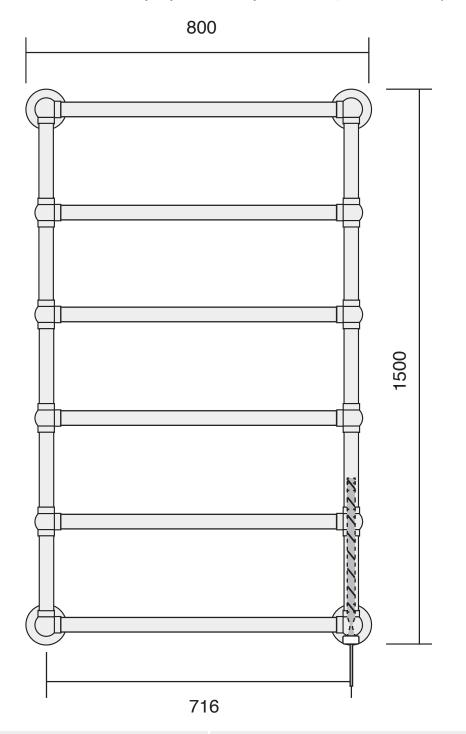

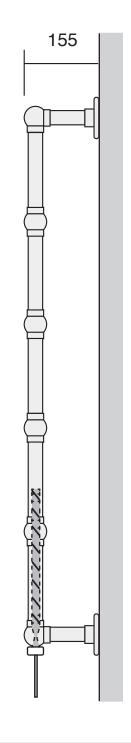

Test pressure: 6 BAR

Electric element: Right hand

Heat output determined in accordance with EN 442

Electric element wattage: 200

Height over flange: 1500

(Approx 80mm required in addition for element)

Width over flange: 800

Overall projection: 155

Tube Ø mm: 31.8

Bard & Brazier rails are made

in England from high quality brass