

All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

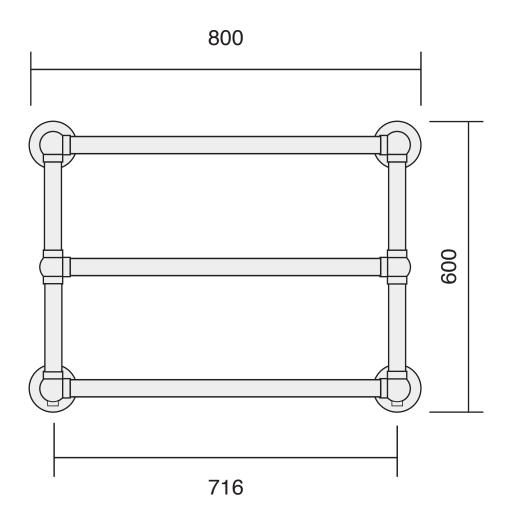

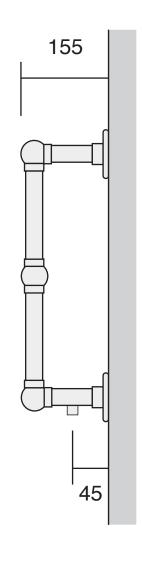



rest pressure.	0 DAN
Max working pressure:	3 BAR
Max working temperature:	100°C
Connections:	1/2" FI

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60:	925
Height over flange:	600
Width over flange:	800
Overall projection:	155
Valve centres:	716
Tube Ø mm:	31.8

Bard & Brazier rails are made in England from high quality brass and can be used on open or closed circuits All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

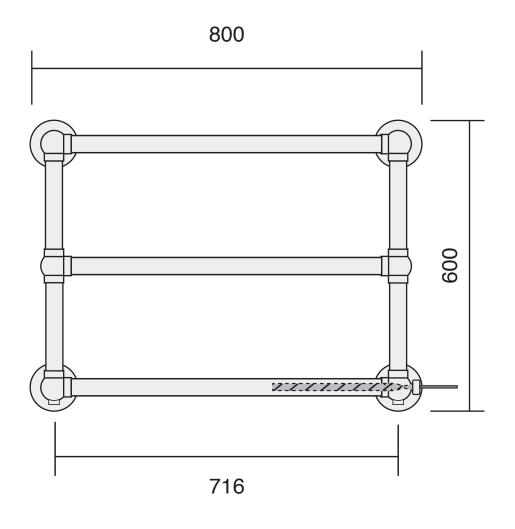

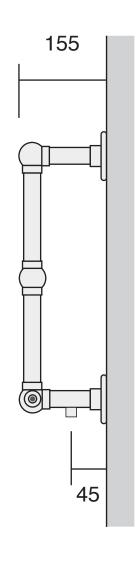

Test pressure: 6 BAR

Max working pressure: 3 BAR

Max working temperature: 100°C

Connections: 1/2" FI

Electric element: Right hand

Heat output determined in accordance with EN 442

Btu/hr @ Delta 60: 925

Electric element wattage: 100

Height over flange: 600

Width over flange: 800

(Approx 80mm required in addition for element)

Overall projection: 155


Valve centres: 716


Tube ⊘ mm: 31.8

Bard & Brazier rails are made
in England from high quality brass
and can be used on open or closed

circuits

All dimensions are in mm and may vary + - 5mm as they are hand made, hand soldered and polished

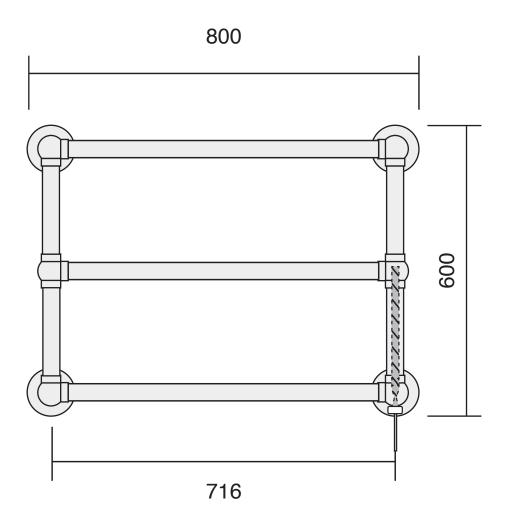

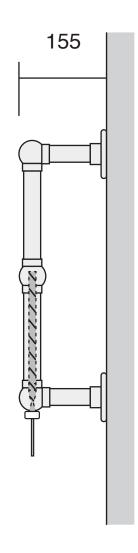

6 BAR Test pressure:

Electric element: Right hand

Heat output determined in accordance with EN 442

Electric element wattage: 100

Height over flange: (Approx 80mm required in addition for element) 600

Width over flange: 800

Overall projection: 155

Tube Ø mm: 31.8 Bard & Brazier rails are made

in England from high quality brass