



TECHNICAL SPECIFICATIONS

DF3260-APSN-52 DOOR LEVER



FLUTE GOOSE NECK COMBINATION AMALFINE IN ALUPEWT AND SATIN NICKEL



ALUPEWT
(AP)



SATIN
NICKEL
(SN)

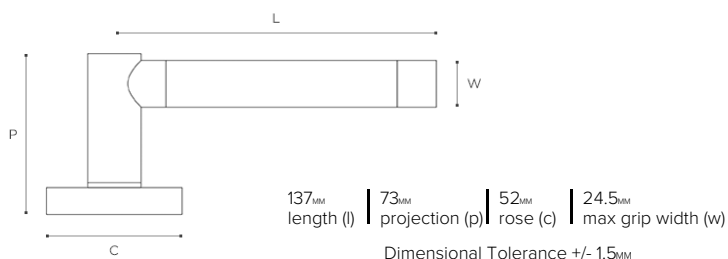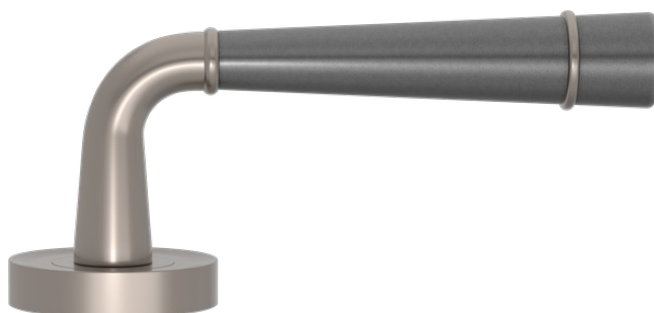

OTHER FINISH OPTIONS

Amalfine Finishes



BLACK BRONZE
BB

COCOA
CO

ALUPEWT
AP

SILVER BRONZE
SB

BONE
BN



BRIGHT CHROME
BC



SATIN NICKEL
SN



POLISHED NICKEL
PN



DARK BRONZE
DB



POLISHED BRASS
PU



FINE ANTIQUE
BRASS
FA



VINTAGE NICKEL
VN



VINTAGE PATINA
VP

ROSE / PLATE OPTIONS



52MM Round
Rose



52MM Square
Rose



62MM US Pre Bore
Round Rose Kit



Rectangle
Plate



Rounded
Plate



52MM Scalloped
Rose



58MM Round
Rose



62MM US Pre Bore
Square Rose Kit



Slimline
Plate



Fineset
Plate

CONFIGURATIONS / FIXINGS

Sprung as standard, unsprung available upon request

Through bolt fixing with M4 X 60mm through bolts (suitable up to door thickness 45mm). Please inform sales if fitting to thicker doors.

8 x 8 x 110mm piercing spindle.

TURNSTYLE DESIGNS LTD

Factory: Baron Way, Roundswell Business Park, Barnstaple, Devon, EX31 3TB, England

+44 (0)1271 325325 - www.turnstyledesigns.com - sales@turnstyledesigns.com