



TECHNICAL SPECIFICATIONS

P2670-APSN DOOR LEVER
CHESTERFIELD RECESS AMALFINE ALUPEWT AND SATIN NICKEL



ALUPEWT
(AP)



SATIN
NICKEL
(SN)

125_{mm} length (l) | 62_{mm} projection (p) | 19_{mm} max grip width (w)
Dimensional Tolerance +/- 1.5_{mm}

OTHER FINISH OPTIONS

Amalfine Finishes



BLACK BRONZE
BB

COCOA
CO

ALUPEWT
AP

SILVER BRONZE
SB



BRIGHT CHROME
BC

SATIN NICKEL
SN

POLISHED NICKEL
PN


POLISHED BRASS
PU

FINE ANTIQUE
BRASS
FA

VINTAGE NICKEL
VN

VINTAGE PATINA
VP

ROSE / PLATE OPTIONS

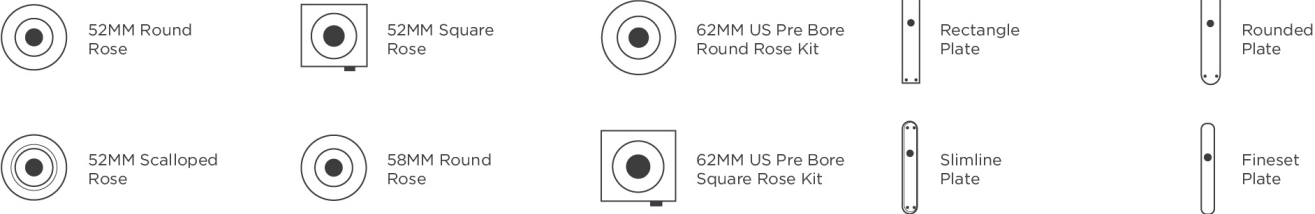

CONFIGURATIONS / FIXINGS

Sprung as standard, unsprung available upon request
Through bolt fixing with M4 X 60mm through bolts (suitable up to door thickness 45mm). Please inform sales if fitting to thicker doors.
8 x 8 x 110mm piercing spindle.